

System Identification and Data Analysis

Homework on Time Series Prediction

Consider the stochastic process $y(t)$ generated as in Figure 1

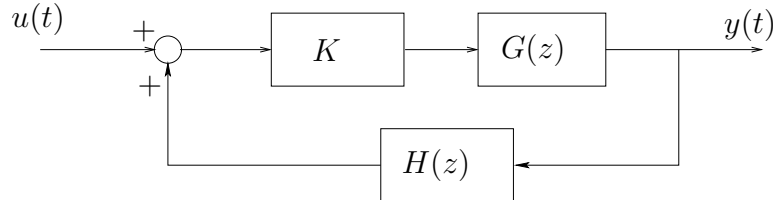


Figura 1.

where

$$G(z) = \frac{z - \frac{3}{4}}{z - \frac{1}{2}}, \quad H(z) = \frac{1}{z},$$

K is a real constant and $u(t)$ is a Gaussian white process with zero mean and variance equal to 8.

1. Find the values of K for which $y(t)$ is asymptotically stationary.
2. Find the spectrum $\Phi_y(z)$ of $y(t)$ and write the equation of $y(t)$ in the form of a MA, AR or ARMA process.
3. Set $K = 1$ and simulate a realization of process $y(t)$, for $t = 1, \dots, N$, with $N = 1000$.
4. By using the realization obtained in item 3, compute the 2-step-ahead predictor $\hat{y}(t+2|t)$ and the corresponding sample mean square error. Compare the true time series $y(t)$ with the predicted one.
5. Compute the theoretical MSE of the Wiener predictor and compare it to the sample one computed in the previous item. Find a meaningful numerical procedure to improve the sample estimate of the MSE.